



→ Depth gauge with dual hook for internal groove or lip thickness with same reference datum, please add hook thickness to datum for depth measurement

→ Thumb roller to control the slider movement

→ Stainless steel, hardened and ground frame

→ Standard functions: Inch/mm Conversion, Auto Power Off, Zero Reset, Low Battery Alert, On/Off, Auto Wake, Cabled Data Output

UKAS
AVAILABLE

DATA
→ OUTPUT

AUTO
WAKE


AUTO
OFF




Specifications

	MS-542-150
Measuring Range mm (inches)	0-150 (0-6)
Resolution mm (inches)	0.01 (0.0005)
Accuracy mm	0.03
Battery	CR2032 3v Lithium Cell
Data Output Type	M-SURE Type 1

Applications

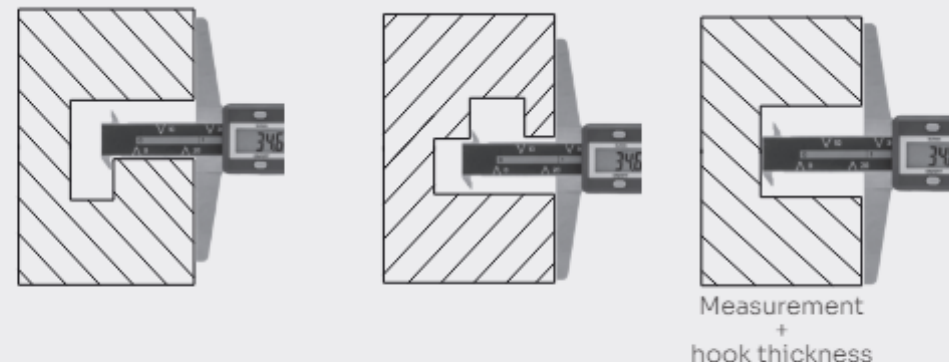

Dimensions

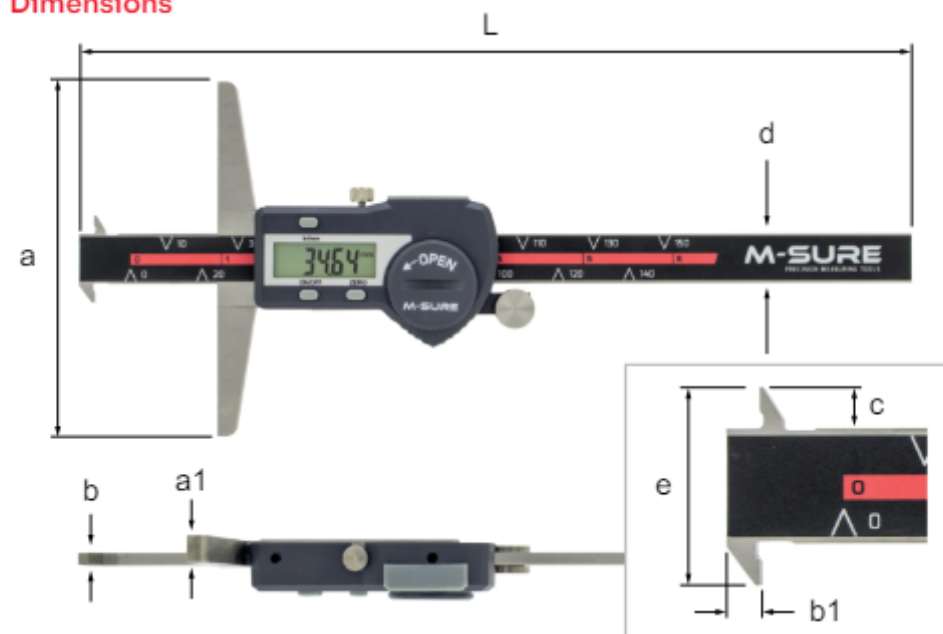

All dimensions in mm

	a	a1	b	b1	c	d	e	L
MS-542-150	100	7	3.5	4	5	14.5	25	233